

# air conditioners

## floor/ceiling concealed



### Quietly efficient


Fujitsu's new duct type air conditioning system offers quiet, efficient operation as either ceiling-mounted or floor-mounted units. The compact design of the units allows for easy installation and makes them ideal for situations where space is at a premium. Adjustable via wired remote control, the new duct type units also feature automatic air flow adjustment.

- High power
- Low noise
- Compact design
- Easy installation
- Program timer
- Auto-restart
- Automatic air flow adjustment
- Washable air filter

FUJITSU



floor/ceiling concealed

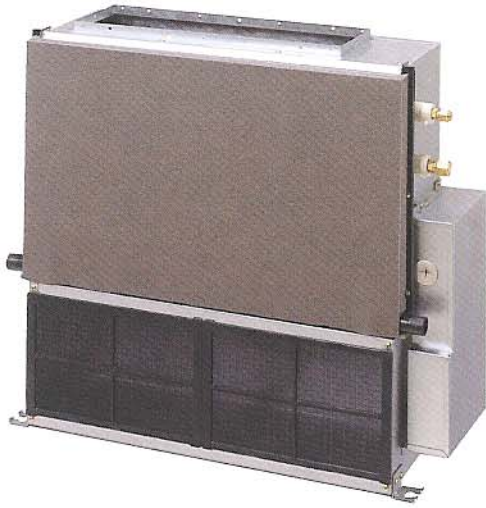

**For ARY9A/9R/14R**



**For ARY18R**



**Wired Remote Controller**





## Cooling



## Cooling/Heating

		ARY9A	ARY7R	ARY9R	ARY12R	ARY14R	ARY18R
		AOY9A	AOY7R	AOY9R	AOY12R	AOY14R	AOY18R
Super Quiet		✓	✓	✓	✓	✓	✓
Auto Air Flow Adjustment		✓	✓	✓	✓	✓	✓
Auto Louvre							
Auto Restart		✓	✓	✓	✓	✓	✓
Sleep Timer							
Program Timer		✓	✓	✓	✓	✓	✓
Auto-Changeover							
Connectable Distributing Duct		✓	✓	✓	✓	✓	✓
Connectable Fresh Air Duct		✓	✓	✓	✓	✓	✓
Energy Save							
Cold Air Prevention							
Dimensions (HxWxD)	Indoor	217x663x595	217x663x595	217x663x595	217x953x595	217x953x595	217x953x595
	Outdoor	530x750x250	530x750x250	530x750x250	530x750x250	643x840x336	643x840x336
Capacity	Cooling kW	2.80	2.15	2.70	3.50	4.00	5.30
	Heating kW		2.45	3.10	4.10	4.50	5.60
Net weight (Kg)	Indoor	18	18	18	25	25	25
	Outdoor	30	31	38	37	TBA	67
Room Air Circulation (high)	m <sup>3</sup> /h	420	340	420	460	640	750
Power Supply	V - PH - HZ	240 - 1 - 50	240 - 1 - 50	240 - 1 - 50	240 - 1 - 50	240 - 1 - 50	240 - 1 - 50
Power Supply to		OUT	OUT	OUT	OUT	OUT	OUT
Running Current	A	4.3	3.6	4.1	5.5	7.2	9.2
Starting Current	A	21	17	21	29	33	50
Fuse Rating	A	15	10	15	15	15	20
Power Consumption	kW	0.97	0.80	0.92	1.30	1.6	2.15
Interconnecting cable		3+E	3+E	3+E	3+E	3+E	3+E
Remote Control Type		Wired	Wired	Wired	Wired	Wired	Wired
Noise levels	Indoor/L/M/W	31/33/35	26/28/31	31/33/35	24/25/26	26/29/32	33/35/36
	Outdoor	48	48	48	49	49	54
Max pipe length	m	15	15	15	15	15	20
Max height difference	m	8	8	8	8	8	8
Refrigerant Charge	m	5	TBA	5	TBA	5	5
Pipe size (inches)	Gas	3/8	3/8	3/8	1/2	1/2	*5/8
	Liquid	1/4	1/4	1/4	1/4	1/4	3/8
Standard Min Operation	°C clg/htg	21	21/0	21/0	21/0	21/0	21/0

**Note:** Fuse ratings shown are only for information. Any fuses or M.C.B.'s installed on-site should be sized in accordance with I.E.E. regulations.

Cooling & Heating capacities are based on the following conditions:

**Cooling:** Indoor Temp.: 27°C DB/19°C WB Outdoor Temp.: 35°C DB/24°C WB

**Heating:** Indoor Temp.: 20°C DB Outdoor Temp.: 7°C DB

**For full installation details please contact your local distributor.**

air  
conditioners

*you'll be glad you fitted...*

**FUJITSU**  
air conditioning

**purifiedair®**

*SPECIALISTS IN ENVIRONMENTAL CONTROL*

Purified Air Ltd, Lyon House, Lyon Rd, Romford  
Essex. RM1 2BG ENGLAND  
Tel: 0800 0184000 Fax: 01708 721488  
E-mail: [enq@purifiedair.co.uk](mailto:enq@purifiedair.co.uk)  
website: [www.purifiedair.co.uk](http://www.purifiedair.co.uk)



CE



The company reserves the right to make any variation in specification to the equipment described or to withdraw or replace products without prior notification or public announcement. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form any part of any contract.