INDUSTRIAL AIR FILTRATION

ESPi RANGE

600 | 1000 | 2000 | 4000 | CENTRALISED

purified chair

INDUSTRIAL AIR FILTRATION EXPERTS

CONTENTS

02

	_	 _	_	_	 		_		_
- 1	n	 п	S	n	 ш	г	n	ВI	C
- 1		 ĸ						N	•
- 1	ш	n	- 3		 ш			ı	-

ESPi 600/1000	02
Product Information	
Technical Specifications	
ESPi 2000/4000	08
Product Information	
Technical Specifications	
ESP Centralised	14
Product Information	
Technical Specifications	

18 ^A

ABOUT US

19

CONTACT US

Purified Air Ltd. has been manufacturing market leading air filtration technology since 1984.

ESPi 600/1000

VERTICALLY MOUNTED

Our Oil Mist Units features a double-pass ESP technology and is efficient at 99%. Due to their compact size and built in fan system, they can be directly mounted to a machine tool.

Specifically designed for the industrial market, this compact unit generates low vibrations, making it ideal for mounting onto fine finishing or high-pressure/neat oil machine tools.

A highly efficient oil, mist and smoke collector is effective on all metalworking fluids.



KEY FEATURES

- Filters particles down to sub-micron levels
- Tested to 99% efficiency
- Low operating costs
- Minimal maintenance required

- Specifically designed for industrial application
- Energy efficient
- Removes oil, mist and smoke
- Compact design

7 4

HOW IT'S INSTALLED


Installations will be directed by the customer and can be either:

1 Direct mounted with plenum

02 Side Mounted with plenum and gallows bracket

Stand mounted with plenum separate

Note: Purified Air do not recommend direct mounting

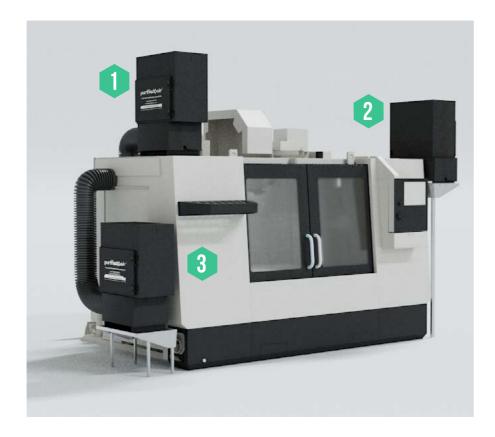

FILTERS REMOVE



Smoke




Oil



Mist

THE ELECTROSTATIC PROCESS

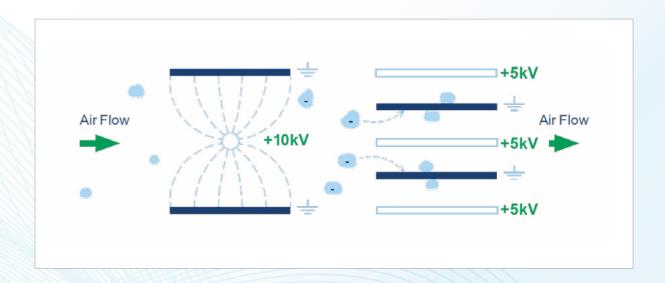

The above diagram shows, in a basic visual, how an electrostatic precipitator works:

As air passes into the combined ioniser / collector cell, the particulates in the air stream are polarised.
As they continue through the ioniser and between the collector cell plates,

the polarised particulates are repelled away from the positively charged plates and attracted to the earthed plates where they stick and so are filtered out of the air flow.

THE BENEFITS OF ELECTROSTATIC TECHNOLOGY



Eliminates 99% of particles



Filters particles down to sub-micron levels



Compact design



OUR SERVICES



Design



Manufacture




Maintain

TECHNICAL SPECIFICATION


	ESPI 600	ESPi 1000
Electrical Supply	220/240 50/60Hz	220/240 50/60Hz
Max Air Volume (CFM)	353 CFM	589 CFM
Max Power Consumption	230w	280w
	24.61	24.61
Dimensions (inches)	16.54	23.62
	15.31	15.31
Weight (lbs)	66.15	90.41

DRAWINGS


ESPi 600

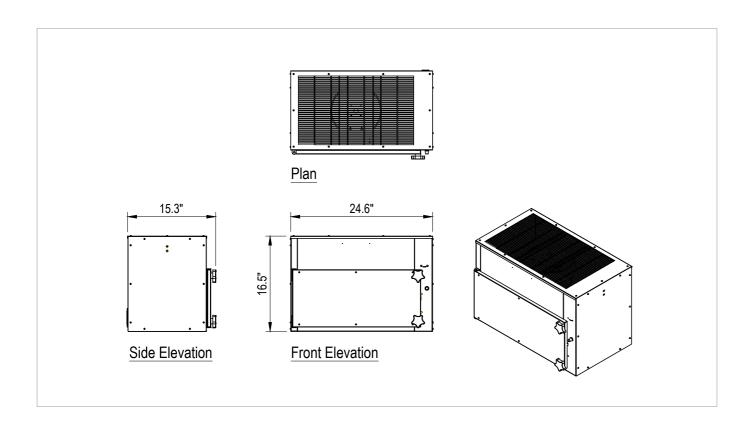

ESPi 1000

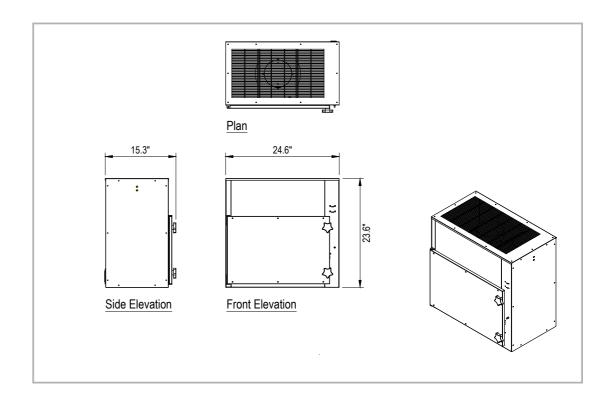

PLENUM

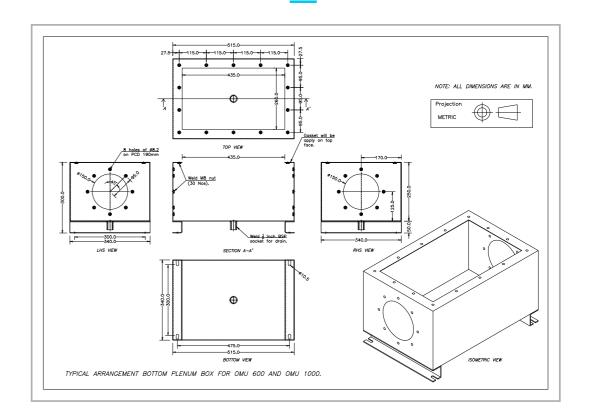

6 TECHNICAL OVERVIEW 7

ESPi 2000/4000

HORIZONTALLY MOUNTED

Our Electrostatic
Precipitators, or ESPs, are
up to 99% efficient. Due
to their modular design
and built-in fan system,
the units can be mounted
on a machine tool, on a
freestanding stand or via
a transition to allow for
venting to the atmosphere.

Specifically designed to work with more significant airflow volumes of larger high-pressure neat oil machines, this highly efficient oil mist, smoke, and fume collector is effective in most manufacturing processes.



KEY FEATURES

- Filters particles down to sub-micron levels
- Tested to 99% efficiency
- Low operating costs
- Minimal maintenance required

- Specifically designed for industrial application
- Energy efficient
- Removes oil, mist and smoke
- Compact design

7 6

HOW IT'S INSTALLED

Installations will be directed by the customer and can be either:

Side Mounted with gallows bracket

02 Stand mounted separate

2000/4000 unit can only be directly mounted on larger machinery.

Note: Purified Air do not recommend Direct mounting.



FILTERS REMOVE



Smoke



Oil



Mist

THE ELECTROSTATIC PROCESS



The above diagram shows, in a basic visual, how an electrostatic precipitator works:

As air passes into the combined ioniser / collector cell, the particulates in the air stream are polarised. As they continue through the ioniser and between the collector cell plates,

the polarised particulates are repelled away from the positively charged plates and attracted to the earthed plates where they stick and so are filtered out of the air flow.

THE BENEFITS OF ELECTROSTATIC TECHNOLOGY



Eliminates 99% of particles



Filters particles down to sub-micron levels



Compact design



OUR SERVICES



Design



Manufacture




Maintain

TECHNICAL SPECIFICATION


	ESPi 2000	ESPi 4000
Electrical Supply	220/240 50/60Hz	220/240 50/60Hz
Max Air Volume (CFM)	1177 CFM	2354 CFM
Max Power Consumption	540w	1080w
	23.98	41.61
Dimensions (inches)	27.17	27.17
	42.24	42.24
Weight (lbs)	145.53	291.06

DRAWINGS

ESPI 2000

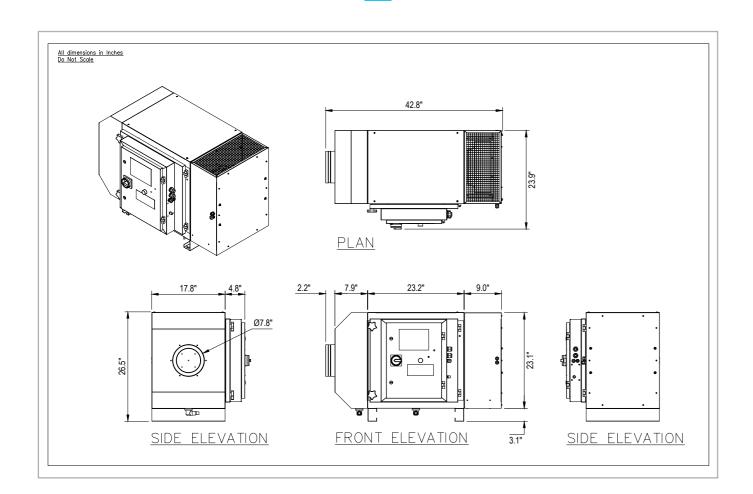

ESPI 4000

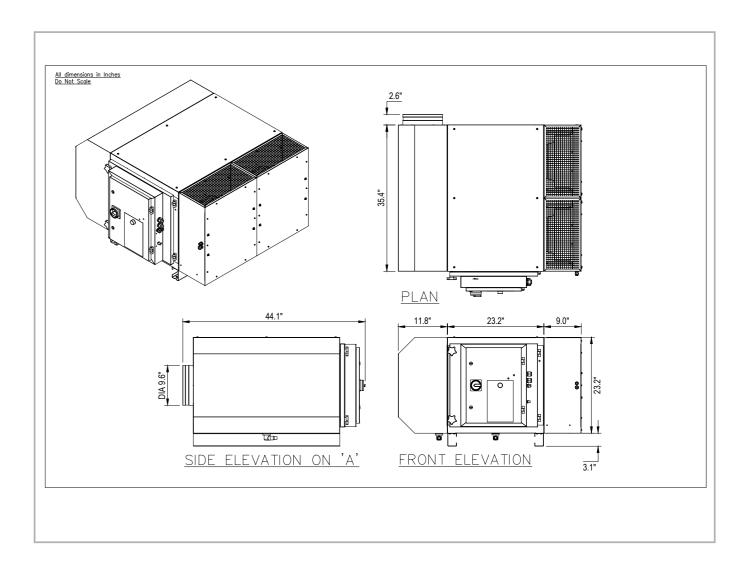

12 TECHNICAL OVERVIEW 13

ESP CENTRALISED

1500 | 3000 | 4500 | 6000

Our Electrostatic
Precipitators, or ESPs,
are ideally suited to
larger volumes of smoke,
fumes and oil mist. The
unit's sizeable modular
capacity can be configured
from 2500m³/h up to
60,000m³/h. They are IP65rated and have a built-in
sump and drain point.

Access doors and replaceable components enable them to be serviced easily and quickly, reducing workshop downtime. In addition, systems can be configured to remove odour control to offer greater comfort within the workshop or industrial environment by lowering the contaminated air that is exhausted into the atmosphere.

Our products are compact, energyefficient and affordable for small workshops (cellular) but scalable for large turnkey projects (centralised), delivering a significant ROI.



KEY FEATURES

- Eliminates up to 98% of oil mist, fumes and smoke particles
- Suited for large air volumes
- Filters particles down to submicron levels
- Designed with an integral sump
- Modular in design

- Designed for industrial application
- ▶ Energy efficient: uses 20–50W
- Quick and easy service access
- reducing workshop down time

IP65 rated

for outside location

HOW IT WORKS

Our ESP units fit in-line with the workshop ducting and can be configured modularly to cope with all extract volume requirements.

Smoke, fumes and oil mist particulates

Air drawn up through the ducting

03 ESP - Particulate Control Unit

Purified air drawn out to exhaust



TECHNICAL SPECIFICATION

	ESP 1500	ESP 3000	ESP 4500	ESP 6000
Electrical Supply	220/240V 50-60Hz	220/240V 50-60Hz	220/240V 50-60Hz	220/240V 50-60Hz
Max Air Volume	1500 CFM	3000 CFM	45000 CFM	6000 CFM
Max Power Consumption	20w	30w	40w	50w
Dimensions (inches)	W 17.7 in	W 35.4 in	W 53.1 in	W 70.9 in
	H24.8 in	H 24.8 in	H 24.8 in	H 24.8 in
	D 25.2 in	D 25.2 in	D 25.2 in	D 25.2 in
Weight (lbs)	122lbs	188 lbs	260 lbs	338 lbs

THE ELECTROSTATIC PROCESS



The above diagram shows, in a basic visual, how an electrostatic precipitator works:

As air passes into the combined ioniser / collector cell, the particulates in the air stream are polarised.
As they continue through the ioniser and between the collector cell plates,

the polarised particulates are repelled away from the negatively charged plates and attracted to the earthed plates where they stick and so are filtered out of the air flow.

THE BENEFITS OF ELECTROSTATIC TECHNOLOGY

%

Eliminates up to 99% of particles



Filters particles down to sub-micron levels



sign Energy efficient

16

purificutoair

ABOUT US

Purified Air's ESPs have been used by some of the world's largest brands since 1984. In those 40 years we have developed a technology first approach allowing us to deliver highly efficient products supporting our partners in many different sectors, covering individual cellular extraction through to large turnkey projects. We are the only UK-based manufacturer of industrial/commercial electrostatic precipitators (ESPs). Modular, affordable, and scalable, our systems are unrivalled, with an efficiency of 99% down to 0.01µm.





WORLDWIDE COVERAGE




Middle East

Europe

North America

Asia

Australasia

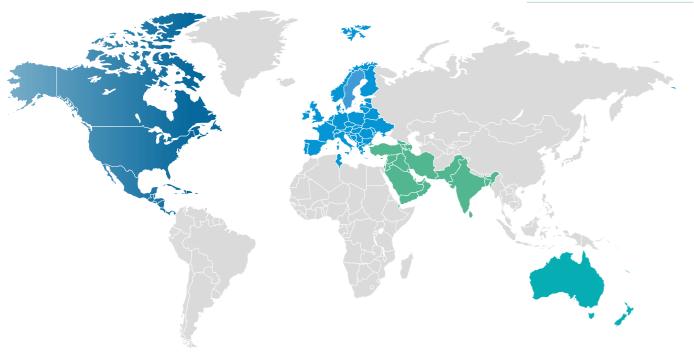

GET IN TOUCH

**** +44 (0) 1708 755 414

✓ enq@purifiedair.com

Purified Air Limited, Lyon House Lyon Road, Romford, Essex RM1 2BG

purifiedair.com

